



Anwendungen: UV, blaue Laser, Argon, Justierung (530 - 534 nm)
Filtermaterial: Spezialkunststoff
Filterfarbe: orange
Filterdicke: ca. 3,0 mm
VLT: ca. 40 %

Schutzstufen

Wellenlänge (nm)	Zertifizierte Schutzstufen (EN 207/208)	OD-Werte
315 – 520	D LB4	OD 4+
>520 – 525	D LB3	OD 3+
>525 – 534	D LB2	OD 2+
>534 – 540	D LB1	OD 1+
0,1W 2*E-5J 530 - 534 RB2		
PF S CE		

Data sheet

Laser Safety Filter 0214

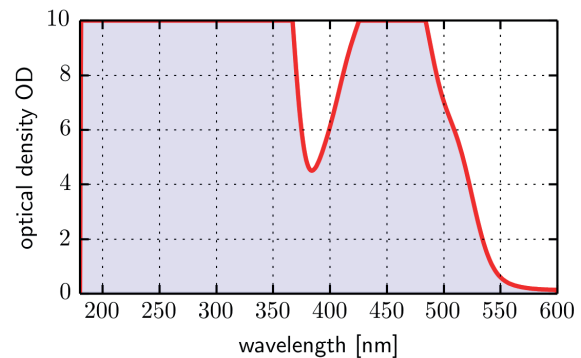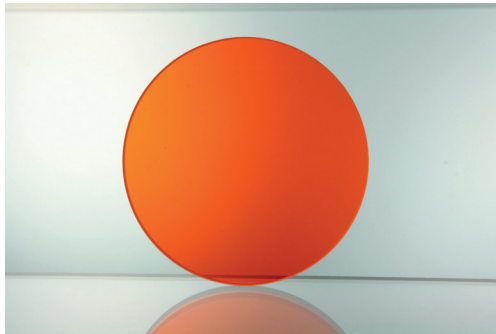

Applications: UV, blue laser, Argon, Alignment
(530 - 534 nm)

Filter material: special plastic

Filter color: orange

Filter thickness: appr. 3.0 mm

VLT: appr. 40 %

Protection Levels

Wavelength (nm)	Certified protection levels (EN 207/208)	OD-Values
315 – 520	D LB4	OD 4+
>520 – 525	D LB3	OD 3+
>525 – 534	D LB2	OD 2+
>534 – 540	D LB1	OD 1+
0.1W 2*E-5J 530 - 534 RB2		
PF S CE		