Laser protection window, filter - 0440, dimensions 810 x 950 mm, thickness 4 mm

Product information:

Item no.: 100-K0440-810x950

Application: Diode (980 nm) Yb:YAG/Disc (1030 nm) Nd:YAG (1064 nm) Fiber (976 – 1080 nm) , VLT (Visible light transmission): 40 %

Filter color: yellow

Filter material: Special plastic

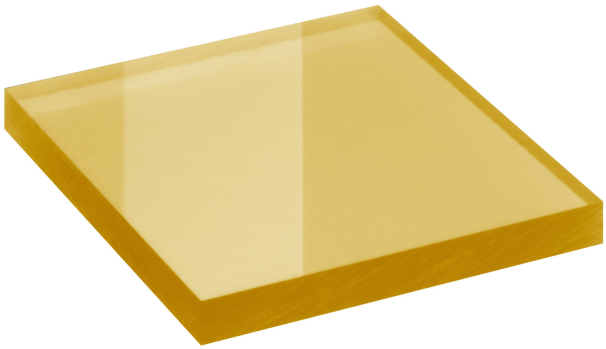

Laser protection window made of special yellow plastic suitable for Diode (940 - 980 nm), Yb:YAG/Disk (1030 nm), Nd:YAG (1064 nm), Fiber (976 - 1080 nm)

Datenblatt

PROTECT LASERSCHUTZ GMBH
Ihre Sicherheit. Unser Auftrag!
Your Safety. Our Concern!

Qualified protection levels according to EN 12254

Protection levels	Wavelengths
DIRM AB1 (OD1+)	• 748-802
DIRM AB2 (OD2+)	• >802-866
DIRM AB3 (OD3+)	• >866-896
DIRM AB4 (OD4+)	• >896-931
DIRM AB5 (OD5+)	• >931-965
DIRM AB6 (OD6+)	• >965-991
DIRM AB7 (OD7+)	• >991-1012
DIR AB7 + M AB8 (OD8+)	• >1012-1050
D AB6 + IR AB7 + M AB8 (OD8+)	• >1050-1083
DIRM AB6 (OD6+)	• >1083-1110
PF CE	

Properties:

Laser protection windows enable your employees to safely observe the processes in a laser system. Regardless of whether you want to integrate the laser protection windows in machine enclosures or in movable walls, we offer you the right, tested protection for your laser system, for your laser equipment and for your laser application. Depending on the desired protection level or window size, you can choose between windows made of glass or plastic. In addition to a variety of standard sizes, custom cuts are also possible thanks to our in-house production.

The **0440 laser protection filter** is particularly suitable as laser protection for powerful **Diode (980 nm)**, **Yb:YAG/Disk (1030 nm)**, **Nd:YAG (1064 nm)** und **Fiber (976 - 1080 nm) lasers**. However, other lasers are also covered by the filter. The laser safety filter is made of a special yellow plastic and has a daylight transmission of approx. 40% at low thickness. The laser safety filter is **qualified** according to the regulations of **EN 12254**.

- dimensions 810 x 950 mm, general tolerances according to DIN ISO 2768-1, Table 1 - c
- PROTECT STANDARD for visual defects of laser protective windows
- also available in standard size 100 x 200 mm, 210 x 297 mm and maximal size 1000 x 1800 mm
- other customized sizes available on request
- suitable window frames available on request

For a perfect and safe cleaning of this filter we recommend this cleaning spray.